



UR7e

Technical specification

The UR7e brings ultimate flexibility to medium-duty applications with a payload of up to 7.5 kg and a reach of 850 mm.

Today, more than 100,000 UR collaborative industrial robots have been delivered to customers across industries and around the world. The e-Series of cobots brings incredible flexibility and unparalleled ease of use to your application.

Updated May 2025.
 Copyright © 2025 by Universal Robots A/S. All rights reserved.

Features

IP Classification	IP54
Noise	< 65 dB(A)
Arm mounting	Any orientation
I/O Ports at tool flange	
Digital In	2
Digital Out	2
Analog In	2
Power supply voltage	12/24 V
Power supply	1.5 A (Dual pin), 1 A (Single pin)

Physical

Footprint	Ø151 mm
Materials	Aluminum, plastic, steel
Tool flange	M8 8-pin female, EN ISO-9409-1-50-4-M6
Connector type	M8 8-pin female
Cable length (robot arm)	6 m (236 in)
Weight including cable	20.6 kg (45.4 lbs)
Humidity	≤ 90% RH (non-condensing)

Contact

Universal Robots A/S
 Energivej 51
 5260 Odense
 Denmark

+45 89 93 89 89
sales@universal-robots.com
universal-robots.com

Teach Pendant

Features

IP classification	IP54
Humidity	≤ 90% RH (non-condensing)
Display resolution	1280 x 800 pixels

Physical

Materials	Plastic
Teach pendant size (W x H x D)	300 mm x 231 mm x 50 mm (11.8 in x 9.1 in x 1.97 in)
Weight	1.6 kg (3.5 lbs) including 1 m of teach pendant cable
Cable length	4.5 m (177.17 in)

Control Box

Features

IP classification	IP44
Operating temperature range*	Ambient temperature: 0-50°C (32-122°F)
Humidity	≤ 90% RH (non-condensing)

I/O Ports

Digital In	16
Digital Out	16
Analog In	2
Analog Out	2
Quadrature digital inputs	4
I/O Power Supply	24V, 2A

Industrial protocols

Hardware interfaces	Modbus TCP (Client/Server) Ethernet/IP Adapter PROFINET device, PROFI-safe ROS/ROS2 Ethernet 1 Gb/s USB 2.0 USB 3.0 Mini DisplayPort Injection Moulding Machine Interface (SPI AN-146 & Euromap-67)*
---------------------	---




Power Source	100-240 VAC, 47-440 Hz
--------------	------------------------

*Only valid for OEM version.


Physical

Control Box Size (W x H x D)	460 mm x 449 mm x 254 mm (18.2 in x 17.6 in x 10 in)
Weight	12 kg (26.5 lbs)
Materials	Powder coated steel

The control box is also available in an OEM version.

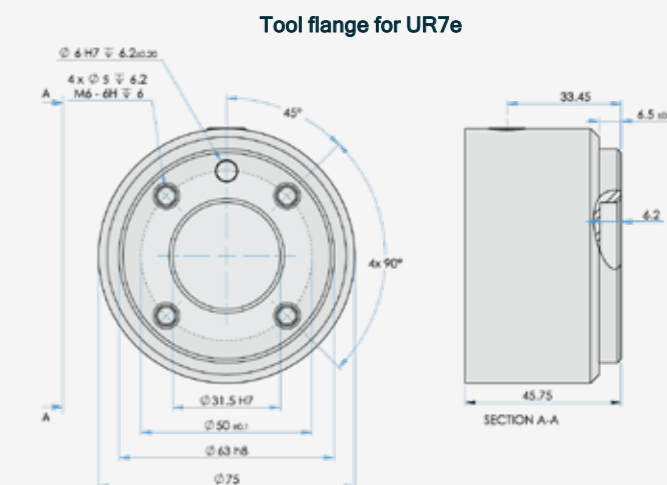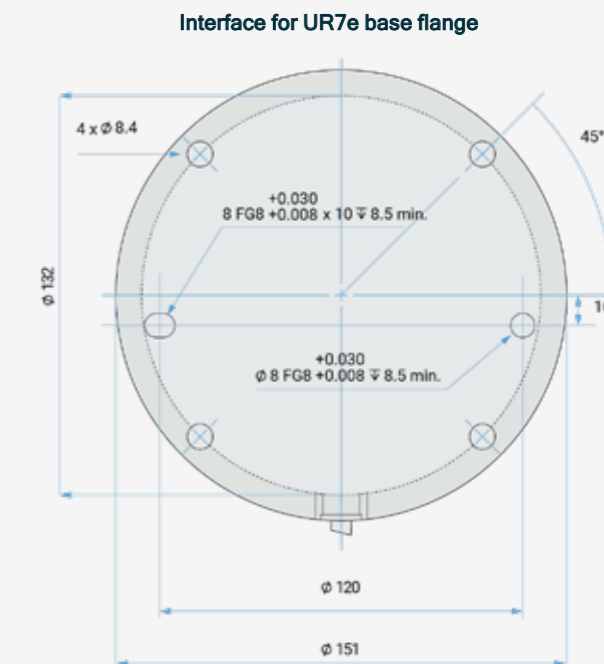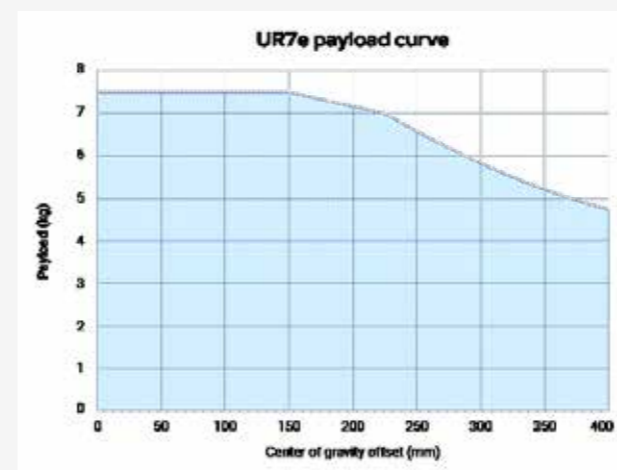

Dimensions and reach of UR7e

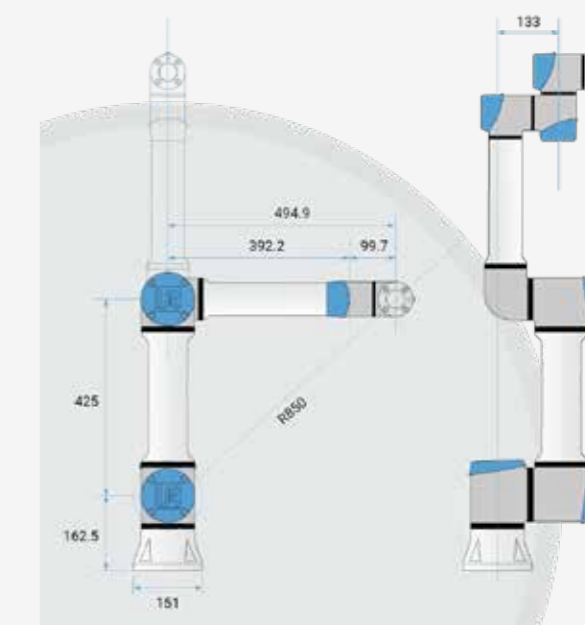

UR7e

General specification

Payload	7.5 kg (16.5 lbs)
Reach	850 mm (33.5 in)
Degrees of freedom	6 rotating joints
Programming	12 inch touchscreen with PolyScope graphical user interface
Power consumption (average)	
Maximum power	570 W
Moderate operating settings	200 W
Operating temperature range	Ambient temperature: 0-50°C (32-122°F)
Safety functions	21 configurable safety functions
In compliance with	EN ISO 13849-1 (PLD Category 3), EN ISO 10218-1

UR7e Robot Arm

Performance

Force sensing, tool flange/torque sensor	Force, x-y-z	Torque, x-y-z
Range	± 50.0 N	± 10.0 Nm
Precision	± 3.5 N	± 0.2 Nm
Accuracy	± 4.0 N	± 0.3 Nm

Movement

Axis movement	Working range	Maximum speed
Base	± 360°	± 180°/s
Shoulder	± 360°	± 180°/s
Elbow	± 360°	± 180°/s
Wrist 1	± 360°	± 180°/s
Wrist 2	± 360°	± 180°/s
Wrist 3	± 360°	± 180°/s